




USER GUIDE


- ✓ Each TuffBase piece and stack is forkliftable. While unloading, drive slowly to prevent stack from sliding and keep stack low to ground for safety.
- ✓ Tools: Level, power drill, and a T25 star bit (needed to remove protective wood from stacks).
- ✓ Level and pack substrate. If a liner or leak detection is being used place under the TuffBase®.
- ✓ Use marker paint to spot the center of the tank's desired placement. Use the TuffBase® universal center guide hole to align base with mark.
- ✓ Each outer piece has a flat spot to house manway if needed.

TUFFBASE® FEATURES

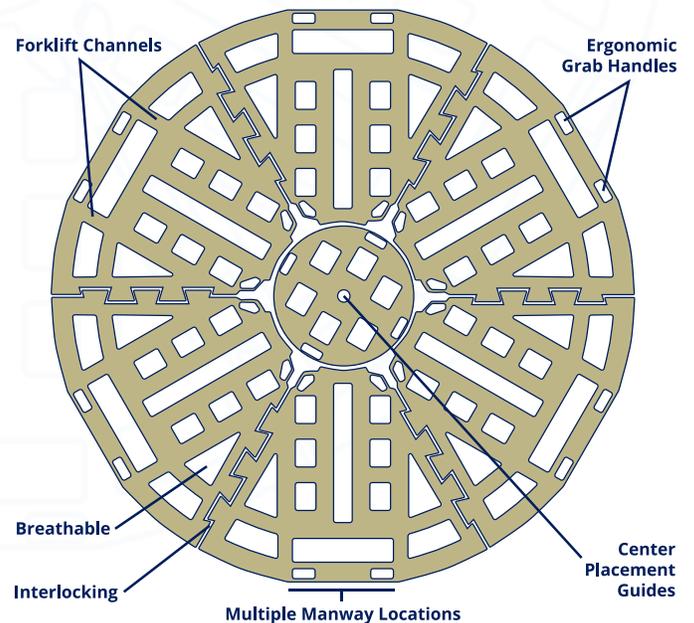

FOR USE WITH FLAT BOTTOM TANKS ONLY


ASSEMBLY VIEWS

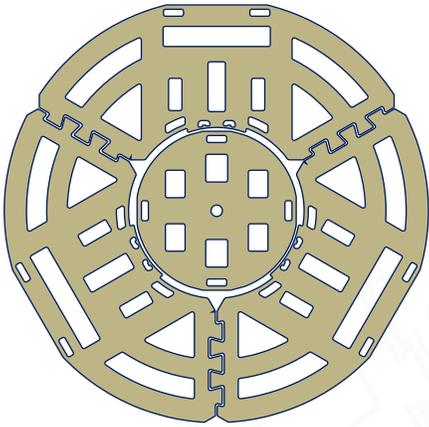

10' TuffBase®

(1) center, (3) 10' outers


Not to exceed 12 PSI or 135,720 lbs.
5" tall, 123" wide

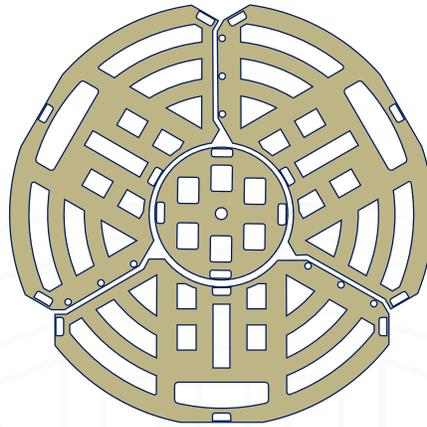

12' TuffBase®

(1) center, (3) 12' outers


Not to exceed 12 PSI or 195,432 lbs.
5" tall, 147" wide

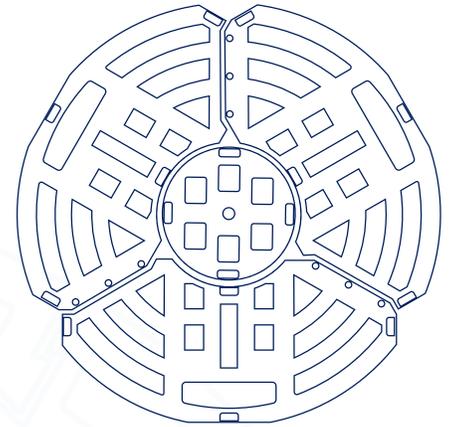

12' HD TuffBase®

(1) HD center, (3) 12' HD outers


Not to exceed 15 PSI or 244,290 lbs.
5" tall, 147" wide

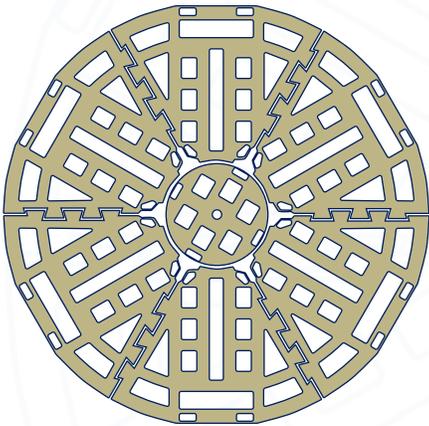

15'6" TuffBase®

(1) center, (6) 15'6" outers


Not to exceed 12 PSI or 326,064 lbs.
5" tall, 189" wide

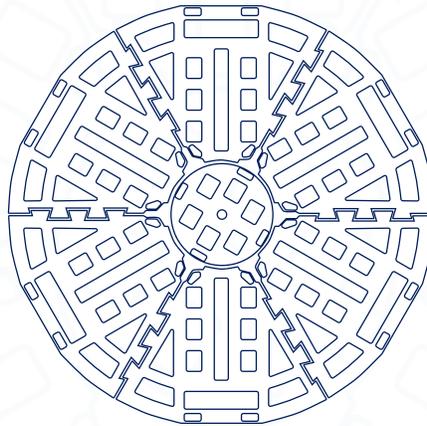

15'6" HD TuffBase®

(1) HD center, (6) 15'6" HD outers

Not to exceed 15 PSI or 407,580 lbs.
5" tall, 189" wide

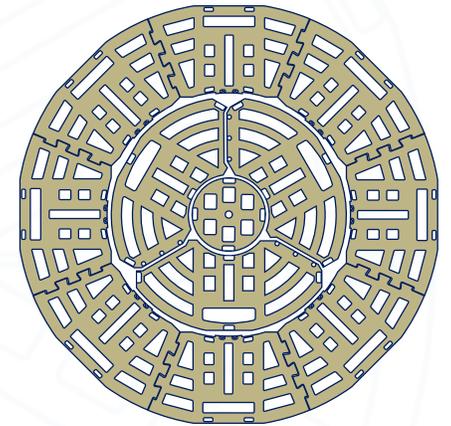

21'6" TuffBase®

(1) center, (3) 12' outers and (8) 21'6" outers

Not to exceed 12 PSI or 627,348
5" tall, 261" wide

If your project requires uncommon or heavier loads than listed above, please reach out as TuffBase can be custom ordered to meet your needs.



CONTACT US

405-542-3069

www.tuffbase.com

@murrayservicesinc

@murrayservicesinc.

@MurrayServices,Inc.



SCAN TO
WATCH VIDEOS