




TUFFRING® USER GUIDE


- ✓ TuffRing® stacks are bundled during shipment and are forkliftable. While unloading and moving keep low to ground and move slowly. You will need a T25 star bit to unpack the wood used during shipment.
- ✓ Level and pack substrate. If a line or leak detection pad is used place it under the TuffRing®.
- ✓ To find center of the TuffRing® use multiple string lines from handle to opposite handle creating a center cross.
- ✓ TuffRing® pieces are interlocking and each piece weighs approximately 100 pounds.

ASSEMBLY VIEWS

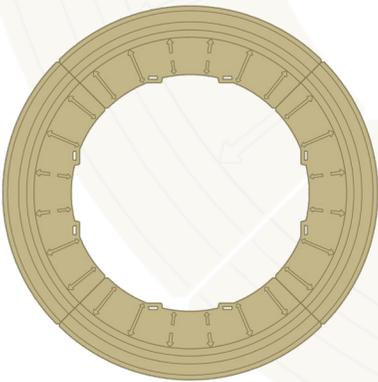

12' TuffRing®

- (4) 12' TR outers
- Not to exceed 65 PSI
- Minimum base ring 8"
- 5" tall, load area ID 131", OD 157"

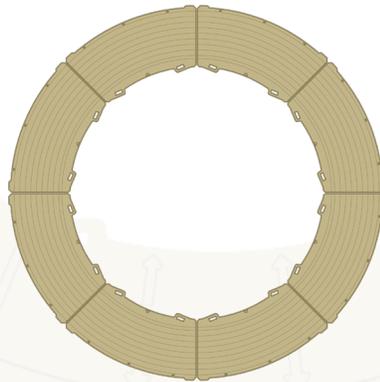

15.6' TuffRing®

- (8) 15'6" TR outers
- Not to exceed 65 PSI
- Minimum base ring 8"
- 5" tall, load area ID 143", OD 195"

If your project requires uncommon or heavier loads than listed above, please reach out as TuffRings can be custom ordered to meet your needs.

CONTACT US

www.tuffbase.com 

405-542-3069 

@MurrayServices,Inc. 

@murrayservicesinc 

@murrayservicesinc. 



SCAN TO
WATCH VIDEOS